

Overview

405 Series strobes are weatherproof devices specially designed for use with compatible life safety communication and control equipment to alert the hearing impaired of a life safety event. Strobes are available with 15/75 cd effective flash intensity. They are fully compatible with Genesis signals.

405 Series strobes exceed UL synchronization requirements (within 10 milliseconds other over a two-hour period) when used with a compatible synchronization source.

The flash from 405 Series strobes can be noticed from almost any position in the room, corridor, or large open space. 405 Series strobes are UL 1971 listed with both wall and ceiling cd intensity ratings (see Specifications). This is useful in areas where the Authority Having Jurisdiction (AHJ) permits ceiling-mount strobes.

405 Series strobes are designed for 16 to 33 Vdc operation and must be connected to signal circuits that output a constant (not pulsed) voltage. A diode is used to allow full signal circuit supervision and polarized connections are made to terminals that accept up to #12 AWG (2.5mm²) wire.

The strobe front plate is of steel construction finished with durable baked epoxy polyester powder-coat paint.

Standard Features

- **UL 1971-listed synchronizing strobe**
Strobes synchronize to the latest UL 1971 requirements when used with a synchronization source.
- **Approved for public and private mode applications**
UL 1971-listed as signaling devices for the hearing impaired and UL 1638-listed as protective visual signaling appliances.
- **Rugged red or white steel front plate**
Ideal for outdoor or harsh environments.
- **Rated for wall or ceiling installation**
- **Field changeable field markings**
Lens language or standard "FIRE" marking is easily changed with optional LKW and LKC series lens kits.
- **Fits 4-inch square flush box**
Ideal for retrofit and renovation projects.
- **UL/ULC rated for outdoor use**

Weatherproof Strobe

CS405-7A



405 Series



Patented

Application

NOTE: The installation of visible signals are subject to national and local standards, codes, and ordinances. Consult your Authority Having Jurisdiction for device installation requirements, application standards, and minimum performance specifications.

GE Security strobes are UL 1971-listed for use indoors as wall-mounted public-mode notification appliances for the hearing impaired. Prevailing codes require strobes to be used where ambient noise conditions exceed specified levels, where occupants use hearing protection, and in areas of public accommodation. Consult with your Authority Having Jurisdiction for details.

405 Series strobes exceed UL synchronization requirements (within 10 milliseconds other over a two-hour period) when used with a synchronization source. Synchronization is important because a small portion of the population have a condition which may cause them to become disoriented from multiple random flashes of light. GE strobes minimize this risk.

NOTE: The flash intensity of some visible signals may not be adequate to alert or waken occupants in the protected area. Research indicates that the intensity of strobe needed to awaken 90% of sleeping persons is approximately 100 cd. GE Security recommends that strobes in sleeping rooms be rated at at least 110 cd.

WARNING: These devices will not operate without electrical power. As fires frequently cause power interruptions, further safeguards such as backup power supplies may be required.

Operating Current (RMS)


UL Rating	15/75 cd	Typical Current	15/75 cd
16 Vdc	150	24 Vdc	90
16 Vfwr	210	24 Vfwr	128

Vdc: Volts direct current, regulated and filtered
Vfwr: Volts full wave rectified

Current Draw Notes and Comments


1. Current values are shown in mA.
2. UL Nameplate Rating can vary from Typical Current due to measurement methods and instruments used.
3. GE Security recommends using the Typical Current for system design including NAC and Power Supply loading and voltage drop calculations.
4. Use the 16 Vdc RMS current ratings for filtered power supply and battery AH calculations. Use the 16 Vfwr RMS current ratings for unfiltered power supply calculations.
5. Fuses, circuit breakers and other overcurrent protection devices are typically rated for current in RMS values. Most of these devices operate based upon the heating affect of the current flowing through the device. The RMS current determines the heating affect and therefore, the trip and hold threshold for those devices.

Typical Wiring - 24 Vdc

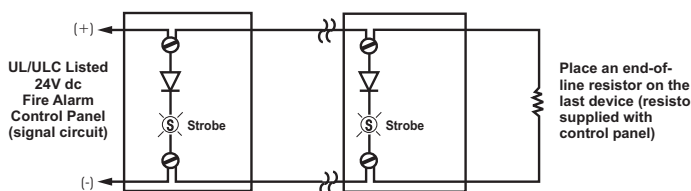


Installation and Mounting

All models fit to a standard flush mounted, North American four inch electrical box, 1-1/2 inch (38 mm) deep minimum. Optional GE Security weatherproof, surface mount boxes are available. The strobes must be connected to signal circuits which output a constant (not pulsed) voltage. GE Security recommends that these strobes always be installed in accordance with the latest recognized edition of national and local fire alarm codes.

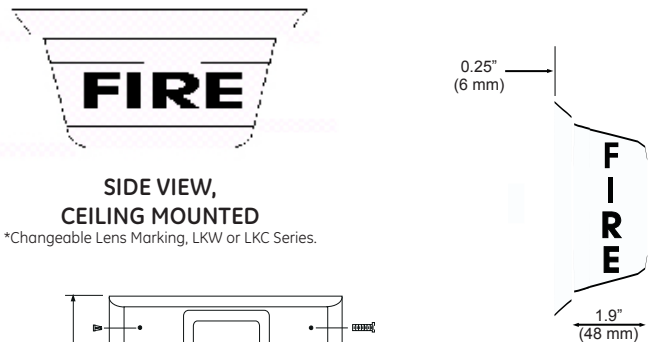

SIDE VIEW, CEILING MOUNTED
*Changeable Lens Marking, LKW or LKC Series.



Countersunk Philip head screws are provided to secure unit onto electrical box.

Two Plastic Caps are provided for indoor mounting.

Specifications

UL 1638/ULC S526 Rated Strobe Output	15/75cd
UL 1971 Rated Strobe Output	15cd wall 15cd ceiling
Strobe Flash Rate	Synchronized at one flash per second. External control module necessary to meet UL 1971 synchronization requirements of 10 milliseconds over a two-hour period.
Synchronization Sources	Module: EG1M-RM; Power Supplies: EBPS6A, EBPS10A; Panels: FX-10, FX-5, FX-3, FX-254, FX-64.
Strobe Operating Volts	Continuous 16 to 33 Vdc or 16 to 33 Vfwr
Operating Environment	INDOOR: 30° C @ 85% RH; 32 - 120° F (0 - 49° C) ambient temperature. OUTDOOR (CS models only): 30° C @ 93% RH; -40-150° F (-40-66° C) ambient temp '7A' (17.7cd @ -35° C per UL @ -40° C per ULC) and; '8A' (70.7cd @ -35°C per UL @ -40°C per ULC) models only
Lens Markings	Supplied with LKW-1 "FIRE" red letters, vertical both sides (Wall Mount) - see LKW and LKC series for ceiling style and optional markings
Wire Connections	Terminals - polarized input, #12 AWG (2.5mm ²) max wire size
Flash Tube Enclosure	Clear LEXAN
Strobe Plate, Finish	CRS steel - 5½ in (140mm) square, red or white baked epoxy polyester powder-coat finish
Mounting	INDOOR: North American 4 in square electrical box; OUTDOOR: 449 series weatherproof surface box
Agency Listings	UL 1971, UL 1638, ULC S526, CE, FM, CSFM, MEA (All models comply with ADA Code of Federal Regulation Chapter 28 Part 36 Final Rule)

Ordering Information

Catalog Number	Description	Ship Wt. lb (kg)
CS405-7A-T	Strobe, 15/75, Outdoor, Red	1 (0.4)
Mounting Accessories		
449	Surface Mount Box, Gray, Outdoor, ('CS' models only)	1 (0.4)
LKW-1	"FIRE" - Wall Orientation (supplied)	
LKW-1R	"FIRE" - Wall Orientation, red with white letters	
LKW-2	"FEU" - Wall Orientation	
LKW-3	"FIRE/FEU" - Wall Orientation	
LKW-4	"SMOKE" - Wall Orientation	
LKW-5	"HALON" - Wall Orientation	
LKW-6	"CO2" - Wall Orientation	
LKW-7	"EMERGENCY" - Wall Orientation	
LKW-8	"ALARM" - Wall Orientation	0.2 (0.1)
LKW-9	"FUEGO" - Wall Orientation	
LKC-1	"FIRE" - Ceiling Orientation	
LKC-2	"FEU" - Ceiling Orientation	
LKC-3	"FIRE/FEU" - Ceiling Orientation	
LKC-4	"SMOKE" - Ceiling Orientation	
LKC-5	"HALON" - Ceiling Orientation	
LKC-6	"CO2" - Ceiling Orientation	
LKC-7	"EMERGENCY" - Ceiling Orientation	
LKC-8	"ALARM" - Ceiling Orientation	

Strobes are shipped with standard wall mount style "FIRE" lens markings.

GE Security

U.S.
T 888-GESECURITY
F 503-691-7566

Canada
T 519 376 2430
F 519 376 7258

Asia
T 852 2907 8108
F 852 2142 5063

Latin America
T 305 593 4301
F 305 593 4300

www.gesecurity.com/fireworx

© 2009 General Electric Company
All Rights Reserved



imagination at work